


LINDEN CHAIR

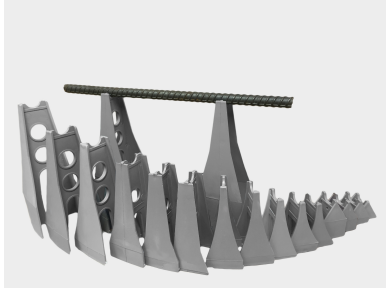

LINDEN CHAIR

Art Mould's All Plastic Linden Chairs are used in slabs for supporting all types of reinforcing steel. Excellent for supporting rebar in bridge deck construction, or where-ever a corrosion free support is required. The high sizes have an arch design for straddling lower mats of rebar. The chair is made of High Impact material and its design gives it the strength of steel. Art Mould's Linden Chairs are strong yet light in weight and packaged in UV protected poly bags for convenience of carrying around job sites.

LINDEN CHAIR SAND PLATES

Linden Chair Sand Plates are designed for use with the Linden Chair. The chair base simply snaps into slots on the plate for a snug connection. Chairs with sand plates are used for slabs on grade with sand, foam and vapour barrier. Ships separately for quick and easy assembly at the job site.

Size Available -	1"-10" every 1/4"
Colour -	Concrete grey
Material -	Reinforced, high impact polypropylene
Strength -	A minimum of 400lbs / chair
Chemical Resistancy -	Excellent
Packaging -	In heavy-duty UV protected poly bags Quantity varies by size
Installation -	Good for both Black and Corrosion Resistant rebar Place chair on deck forms Can straddle bottom steel bars Spacing depends on loads Standard in every 3-4 feet
Sand Plate -	One size fits all Linden Chairs up to 7"

SIZING

HEIGHT	HEIGHT	PC/BAG	BAG/PALLET	PC/PALLET
1"	25MM	500	40	20,000
1-1/4"	32MM	500	40	20,000
1-1/2"	40MM	250	40	10,000
1-3/4"	45MM	250	40	10,000
2"	50MM	250	40	10,000
2-1/4"	58MM	200	40	10,000
2-1/2"	63MM	200	40	8,000
2-3/4"	70MM	300	25	7,500
3"	75MM	300	25	7,500
3-1/4"	77MM	300	25	7,500
3-1/2"	85MM	300	25	7,500
3-3/4"	92MM	200	25	5,000
4"	100MM	200	25	5,000
4-1/4"	108MM	200	25	5,000
4-1/2"	110MM	200	25	5,000
4-3/4"	120MM	200	25	5,000
5"	125MM	200	25	5,000
5-1/4"	133MM	200	25	5,000
5-1/2"	140MM	200	25	5,000
5-3/4"	146MM	200	25	5,000
6"	150MM	100	25	2,500
6-1/4"	158MM	100	25	2,500
6-1/2"	165MM	100	25	2,500
6-3/4"	170MM	100	25	2,500
7"	175MM	100	25	2,500
7-1/4"	183MM	75	25	1,875
7-1/2"	190MM	75	25	1,875
7-3/4"	195MM	75	25	1,875
8"	200MM	75	25	1,875
8-1/4"	210MM	75	25	1,875
8-1/2"	215MM	50	25	1,250
8-3/4"	220MM	50	25	1,250
9"	228MM	50	25	1,250
9-1/4"	235MM	50	25	1,250
9-1/2"	240MM	50	25	1,250
9-3/4"	247MM	50	25	1,250
10"	254MM	50	25	1,250